OSRAM

ORIGINAL - METAL BASE -

Original spare part





The cost-effective original spare parts

ORIGINAL signal lamps with metal bases feature - like all ORIGINAL products from OSRAM - a reliable OEM quality. Due to the wide product range, the lamps can be used as original spare lamps for different applications.

Technical data

Product information

Order reference	3860
Application (Category and Product specific)	Auxiliary lamp


Electrical data

Power input	5 W
Nominal voltage	12.0 V
Nominal wattage	5.00 W
Test voltage	13.5 V
Power input tolerance	±15 %

Photometrical data

Luminous flux	50 lm
Luminous flux tolerance	±20 %

Dimensions & weight

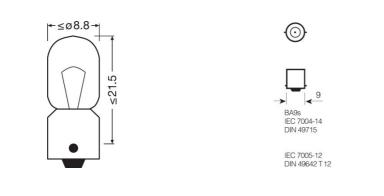

Diameter	9 mm
Product weight	1.89 g
Length	27.4 mm

Lifespan

Lifespan B3	400 h
Lifespan Tc	1000 h

Additional product data

B (1) 1 1 1 1 1 1	B40
Base (standard designation)	BA9S

Capabilities

Technology	AUX
Certificates & standards	
ECE category	-
Approval marks – approval	-

	Order reference	3860
--	-----------------	------

Country specific information

Product code	METEL code	SEG-No.	STK-Number	UK Org
4008321095756	OSRA3860	-	-	-
4008321095763	OSRA3860	-	-	-
4008321095756	OSRA3860	-	-	-

Logistical Data

Product code	Product description	Packaging unit	Dimensions (length	Volume	Gross weight
		(Pieces/Unit)	x width x height)		
4008321095756	ORIGINAL - METAL BASE 3860	Unpacked 1	10 mm x 5 mm x 10 mm	0.00 dm ³	1.00 g
4008321095763	ORIGINAL - METAL BASE 3860	Folding carton box 10	46 mm x 29 mm x 112 mm	0.15 dm³	29.90 g
4008321095770	ORIGINAL - METAL BASE 3860	Shipping carton box 50	148 mm x 115 mm x 55 mm	0.94 dm ³	179.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.













