
Product datasheet

OSRAM

TRUCKSTAR PRO PY21W

Brightest OSRAM truck light



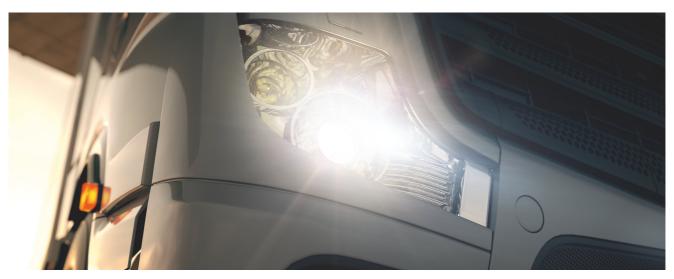

Excellent brightness More light allows to see farther and therefore react sooner



More than double the service life Reduced downtime and fleet costs compared to standard lamps



Very high vibration resistance Suitable for heavy duty applications



The most powerful halogen truck light from OSRAM

Discover TRUCKSTAR PRO signal lamps - the brightest truck light from OSRAM with excellent value for money. With up to 100% more light than standard lamps, extremely long life and very high vibration resistance these 24 volt lamps are ideal for professional drivers while reducing downtime and fleet costs. Thanks to the high vibration resistance, TRUCKSTAR PRO lamps are suitable even for heavy duty applications. Due to their impressive brightness and more than double the service life compared to standard lamps, the lamps improve your safety while driving on the road.

Product datasheet

Technical data

Product information

Order reference	7510TSP
Application (Category and Product specific)	Auxiliary lamp


Electrical data


Power input	28 W
Nominal voltage	24.0 V
Nominal wattage	21.00 W
Power input tolerance	±6 %
Test voltage	28.0 V

Photometrical data

Luminous flux	250 lm
Luminous flux tolerance	±20 %

Dimensions & weight





Length	52.5 mm
Diameter	25.0 mm
Product weight	8.86 g

Lifespan

Lifespan B3	250 h
Lifespan Tc	500 h

Additional product data

Base (standard designation)	BAU15s

Product datasheet

Capabilities

Technology	AUX
Certificates & standards	
ECE category	PY21W
Country specific categorizations	
Order reference	7510TSP

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321798169	TRUCKSTAR PRO PY21W	Unpacked 1	24 mm x 14 mm x 19 mm	0.01 dm³	6.00 g
4008321798176	TRUCKSTAR PRO PY21W	Folding carton box 10	58 mm x 54 mm x 139 mm	0.44 dm ³	110.60 g
4008321798183	TRUCKSTAR PRO PY21W	Shipping carton box 50	273 mm x 145 mm x 65 mm	2.57 dm³	603.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Legal advice

ECE E1 approval

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.







1. 0 ℃ S 2. ⇐□ ↔ [



