
Neptune 001 cross LED



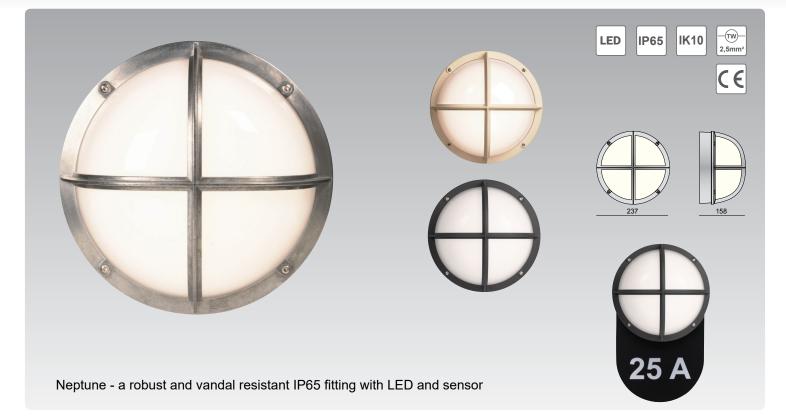

Description

Neptune 001 is a quality fitting in a circular shape (001) made of high pressure die-cast aluminium. Diffuser in UV- and vandal resistant polycarbonate. The front ring is fixed with 4 torx screws in stainless steel which are given a Delta seal treatment. IP65 class I. A number plate is available as accessories. The plate is fixed together with the fitting from behind.

Application areas

P-house, facades, entrances, stairs, pedestrian areas, underpasses and tunnels.

Mounting

Direct in ceiling or on wall. The fittings can also be mounted on the Arc pole.

Installation


The fitting is prepared both for open and hidden installation. Push in terminal block 3x2x2,5 mm² with through-wiring possibilities.

LED module

Colour temperature 3000K - 4000K
Effect fitting 12W
Luminous flux fitting 505 Im
Lifetime L70B50 50.000 t

Additional

The sensibility is adjusted on the microwave sensor. Likewise the hold time (exposure time after detected movement) might be adjusted (5 sek - 25 min). The sensor has also a setting for a twilight function (2 - 30 lux). Radar can also be used as Master for other fittings.



House number plate

White	Black	Alu	Туре	Decor	Light source
108694	108695	108696	Neptune 001 LED	Cross	LED 12W 840
111861	111862	111863	Neptune 001 LED Radar	Cross	LED 12W 840
116300	119214	117447	Neptune 001 LED Radar MinMax	Cross	LED 12W 840 + LED 1W E14
111597	111598	111599	Neptune 001 LED	Cross	LED 12W 830
111870	111871	111872	Neptune 001 LED Radar	Cross	LED 12W 830 LED 12W 830
117757	119213	119212	Neptune 001 LED Radar MinMax		LED 12W 830 + LED 1W E14
Accessories:					
105289	111437	Number plate			

awoid unwanted functions.

Please allow for this when installing the fitting to

A microwave sensor detect all forms of movement, not only from people and

This means that the sensor might detect movements for instance from branches or

animals.

leaves

Reservation for misprinting or product changes.

