

Have you checked e-Bailey?

LED Floodlight Black 180W 6500K

Bailey nr.: 90500037876




BAI LED Floodlight Black Modular 180W 6500K 20400lm 100-277V/AC IP65 IK08 Alu housing black 120D 1m cable

The Floodlight is also called a spotlight or construction lamp. The Led version consumes little power and lasts a long time so that they are more durable than the traditional predecessors. Can be mounted on both wall and ceiling. The housing is made of cast aluminum. Comes with 1m connection cable. Suitable for ambient temperatures from -20 ° C to + 40 ° C. Refer to specifications and warranty for installation.

Constal proportion	
General properties EAN-code	8714681378762
Product series	LED Floodlight
Product Type	Black
Specifications	
Adjustability	Swivelling
With movement sensor	No
With light sensor	No
With light source	Yes
Lamp holder	None
Material housing	Aluminium
Surface protection	Other
Colour housing	Black
Material cover	Glass transparent
Nominal voltage (V)	100 240 V
Voltage type	AC
LED nominal current at constant current	870 870 mA
Dimmable	No
Light sharing	Symmetric
Beamangle	Extreme wide beam >80°
Rated life time L70/B10 at 25 °C	
Rated life time L70/B50 at 25 °C	30000 h
Rated life time L80/B10 at 25 °C	
Rated life time L80/B50 at 25 °C	
Rated life time L90/B10 at 25 °C	
Rated life time L90/B50 at 25 °C	
Degree of protection (IP)	IP65
Impact strength	IK08
Protection class	1
Rated ambient temperature	-20 40 °C
Max. system power (W)	180 W
Colour of light	Other
Colour temperature (K)	6500 6500 K
Colour rendering index CRI	70-79

Specifications	
Luminous flux (Im)	20400 20400 lm
Lamp efficacy (lm/w)	113 lm/W
Power factor	0.9
Width	321 mm
Height/depth	130 mm
Length	430 mm
Outer diameter	
Built-in height/depth	
Built-in diameter	

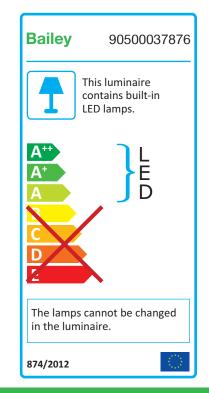

Bailey Lights | Everdenberg 21 | 4902 TT Oosterhout | The Netherlands | sales@bailey.nl | +31 (0) 162 52 24 456 | www.bailey.nl